


**Rocker Switch 16A Double Pole
with and without illumination
Series 714**

General Purpose Rocker switches for Machines, Voltage Stabilizers, Control Panels, Inverters, Washing Machines, UPS etc..

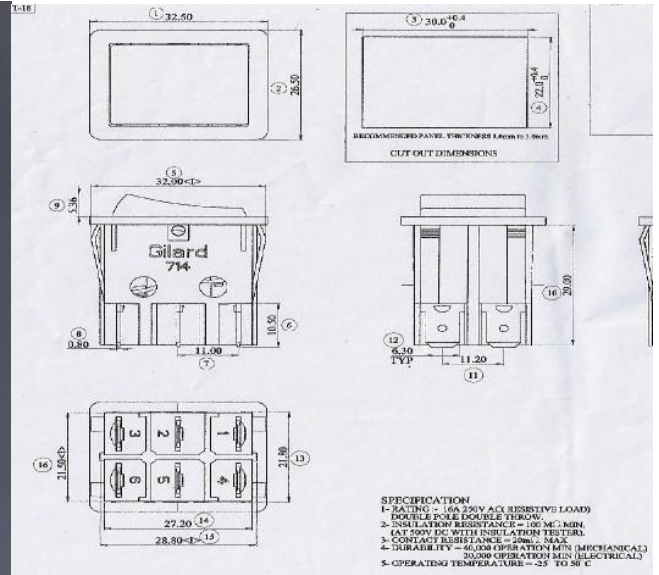

<p>Specifications</p> <p>Reference Standard BIS - IS 3854 - 2015</p>		<p>714-321B : DPST WITH BLACK KNOB 714-322B : DPDT WITH BLACK KNOB</p>
<ul style="list-style-type: none"> Electrical Current Rating - 16 Amperes Operating Voltage - 250 V AC 		<p>714-321R : DPST WITH RED KNOB 714-322R : DPDT WITH RED KNOB</p>
<p>Contact Resistance - Max 20 m Ohm</p> <p>Insulation Resistance - Min 100 M Ohms</p>		<p>714-321Y : DPST WITH YELLOW KNOB 714-322Y : DPDT WITH YELLOW KNOB</p>
<ul style="list-style-type: none"> Operating Temperatures : (-) 25 to (+) 80 degrees Centigrade Connecting Terminals - (QC 6.3 X 0.8 mm) 		<p>714-321G : DPST WITH GREEN KNOB 714-322G : DPDT WITH GREEN KNOB</p>
<ul style="list-style-type: none"> Mounting Panel Window cut out dimensions - 30.0 X 22.0 mm, panel thickness 1 to 3 mm 		<p>714-321AI : DPST WITH ILLUMINATED AMBER KNOB</p>
<ul style="list-style-type: none"> Life <ul style="list-style-type: none"> Electrical - 10,000 cycles Mechanical - 30,000 cycles 		<p>714-321RI : DPST WITH ILLUMINATED RED KNOB</p>

**Gilard Electronics Pvt Ltd C-132, Phase VIII, Industrial Area SAS Nagar (Punjab), Mohali
e-mail : marketing@gilard.com, sales@gilard.com (0172-5020510)**

Disclaimer : Specifications are subject to change. Please confirm with us before use.